


AUTO ICB LEAD
PICKING UP
自动挑引线机

功能描述

- 兼容多种规格组件尺寸，采用伺服归正系统，换型快捷。
- 运动单元由伺服电机驱动，速度快，定位精度高、稳定、可靠。
- 实现自动挑引线，取高温布或撕胶带（二选一）。
- 三处引线同时操作，节拍16s，速度快，效率高
- 伺服控制与产品柔性接触，安全性高。
- 可选配高温布自动堆叠功能，省心省力。


Features

- Compatible with a variety of specifications and module sizes, servo correction system, convenient and quick to change the model.
- The motion unit is driven by a servo motor, with fast speed, high positioning accuracy, stability and reliability.
- Realize automatic pick lead, take high temperature cloth or tear tape (two options).
- The three leads are operated at the same time, the cycle time is 18s, very fast and efficient.
- The servo control is in flexible contact with the product, high security.
- Optional high-temperature cloth automatic stacking function, save worry and effort.

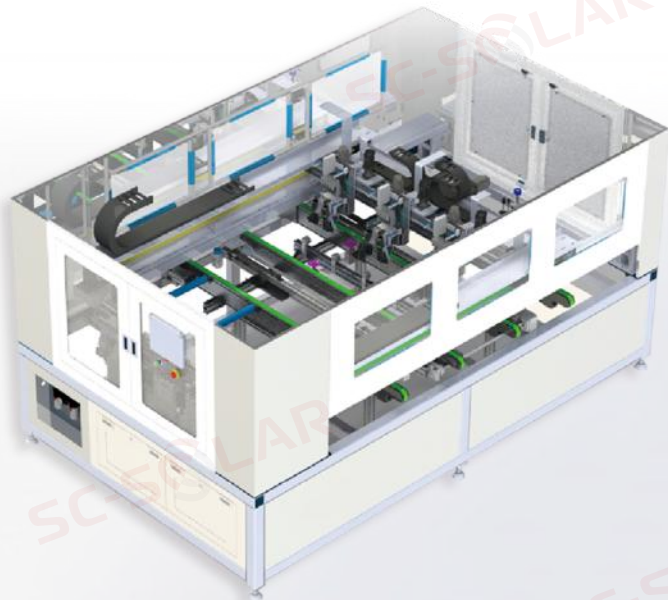

设备技术性能

常规、半片、MBB碎片率：≤0.04%
兼容电池片规格：60片半片/72片半片/MBB半片
高温布换料频率：≥11小时/次
输送方向：横向输送
机械定位：伺服归正
稼动率：≥98%
噪音要求：≤75dB
环境湿度：5%-75%（不结露）
环境温度：15℃-30℃

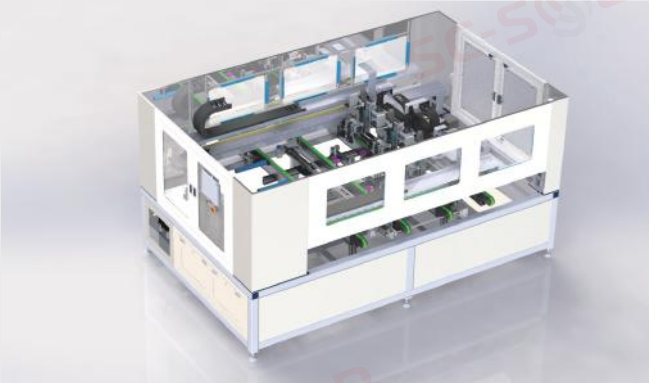

Functionality

Fragmentation rate of normal, half-cell, MBB: ≤0.04%
Compatible cell specifications: 60 half-cell / 72 half-cell / MBB half-cell
High temperature cloth changing frequency: ≥11 hours/time
Conveying direction: horizontal conveying
Mechanical positioning: servo correction
Utilization rate: ≥98%
Noise level: ≤75dB
Environmental humidity: 5%-75% (no dewfall)
Ambient temperature: 15℃-30℃



技术参数 Specifications

项目 Item	数值 Value
适用版型 Compatible module size	长 length 1600-2500(mm); 宽 width 900-1500(mm)
节拍 Cycle time	≤16s
功率 Power	≤5.5kW
电源 Power requirement	AC380V±5%, 3P+1N+1PE, 20A, 50/60Hz
工作气压 Air pressure	0.6-0.8(MPa)
耗气量 Air consumption	200L/min
设备重量 Weight	2000kg
外形尺寸 Dimension(L×W×H)	3600*2200*1900(mm)